Denis Aktivitetsbana

2277112

1-8

14 kids

30,4 m^2

Material specification

- Construction made of the highest quality laminated, impregnated and double coated pine wood 90 x 90 mm without knots, secured from the top with polypropylene plugs,
- Metal anchors made of hot dip galvanized steel, protecting the wood from direct contact with the ground to prevent rot and to extend the product's life,
- Platforms, climbing walls and steps made of durable anti-slip and waterproof plywood or HPL plate,
- Structure for platforms made of hot-dip galvanized and powder coated steel;
- Roofs, side panels made of durable HDPE or HPL plate, resistant to weather conditions,
- Slides made of stainless steel with durable HDPE or HPL side panels,
- "Telephone" - construction - stainless steel pipe, flowers made of HDPE or HPL plates; plastic underground installation,
- Climbing stones made of durable HDPE plate, resistant to weather conditions,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel bars and handrails,
- Screws covered with plastic caps and/or stainless steel screws,

Denis Aktivitetsbana

2277112

1-8

14 kids

30,4 m^2

Recycled Material

- The structure is made of a durable, moisture-resistant and low-temperature recycled composite, Platforms, climbing walls and steps made of durable anti-slip and waterproof plywood or HPL plate,
- Structure for platforms made of hot-dip galvanized and powder coated steel; Roofs and side panels made of recycled HDPE plates, resistant to weather conditions, green HDPE panels made of 100% recycled materials, e.g. ocean waste such as fishing nets and ropes,
- Slides made of stainless steel with sides made of recycled HDPE boards, resistant to amospheric conditions,
- "Telephone" - construction - stainless steel pipe, flowers made of green HDPE plates made of 100% recycled material, e.g. ocean waste such as fishing nets and ropes; plastic underground installation,
- Climbing stones made of green HDPE plates made of 100% recycled material, e.g. ocean waste such as fishing nets and ropes, resistant to weather conditions,

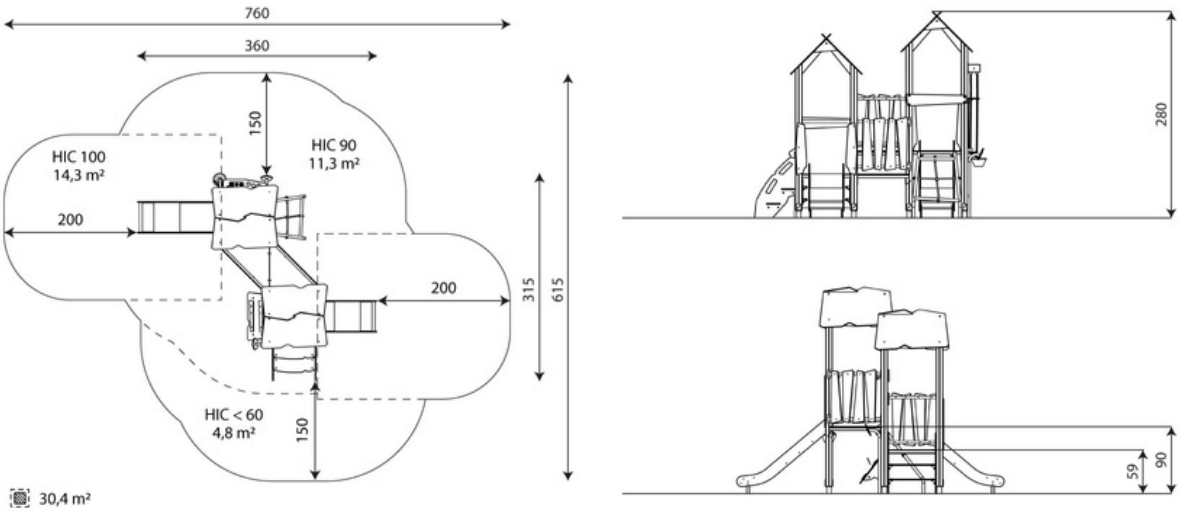

Nordic Play AB
556786-5448
Tel: 0346 451 010
Kabelvägen 15, 311 50 Falkenberg
info@nordicplay.nu
www.nordicplay.nu

TÜV certification

Denis Aktivitetsbana

2277112

Length	360 cm
Width	315 cm
Total height	280 cm
Age group	1 - 8 years
Number of users	14 kids
Safety zone	30,4 m2
Free fall height	90 cm
The height of the platforms	59, 90 cm
In accordance with norm EN	1176-1:2017
Weight of the heaviest part	22 kg
Dimensions of the largest part	257x9x9 cm
Availability of spare parts	YES
Installation time	6 h
Color options	

Data is subject to change without prior notice.

30 year guarantee
Structural strength of steel and stainless steel components

15 year guarantee
Structural failure of steel and stainless steel, for dynamic equipment

10 year guarantee
Structural failure of high density polyethylene and high pressure laminates components

5 year guarantee
Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited
- entity or a declaration of conformity;
- available types of seats in the swing: R1-flat, R2-basket, R3-flat belt, R5-flat with barrier;
- no sharp edges or chinks that would pose a danger of jimming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

Denis Aktivitetsbana

2277112

Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		100

HIC <60	4,8 m²
HIC 90	11,3 m²
HIC 100	14,3 m²
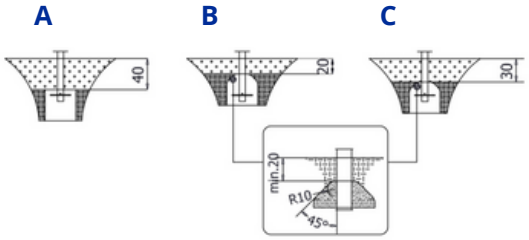
Data is subject to change without prior notice.